



Installing the Switch

2A

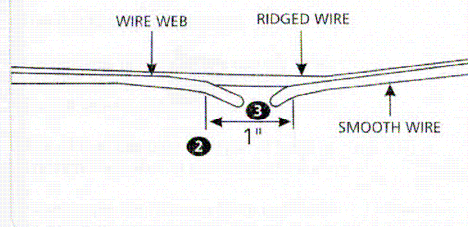

- 1 Choose a place on the cord where the switch is to be mounted.
- 2 With a sharp knife cut about a 1" slot in the cord web. Make sure not to nick the insulation on either wire.
- 3 Cut the smooth wire in half.

2B

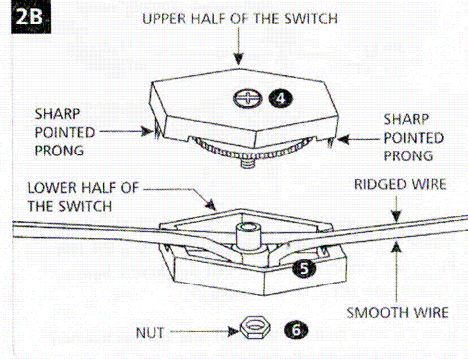

- 4 Loosen the screw on upper half of the switch to remove the nut on the lower half.
- 5 Place the cord in the lower half of the switch (the half without the wheel). The cut wire runs through the center of the switch.
- 6 Press both halves back together. Replace the nut in the lower half and tighten the screw on upper half so that the sharp pointed prongs in upper half of the switch pierce the wire insulation and make contact inside.